

e-SolarMark C340

30-watt CO₂ laser coder

All-in-one laser coding solution


The e-SolarMark C340 laser coder is a complete cost-effective, laser coding solution that is suitable for basic packaging applications in the food, beverage, and other industries. This all-in-one industrial laser coding solution delivers consistently high-quality codes with fast and easy line changeovers.

Your benefits

- Ready to print in one convenient unit. An affordable all-in-one design, laser coder can be ordered complete with a dedicated fume extractor and package sensor mounted on an adjustable stand with a rolling caster base.
- Greater flexibility and uptime. The e-SolarMark C340 laser coder offers you the flexibility to move from one conveyor to the next in less than 15 minutes with convenient adjustable stand and caster base. Also, there is no need to stop production to adjust or fine-tune contrast and code position, which means less downtime.
- Powerful enough to handle most coding and marking applications. e-SolarMark C340 laser coder is capable of meeting all your basic package coding needs with 30-watt, 10.6 μ wavelength laser and choice of 3 lenses from 70 mm x 70 mm to 120 mm x 120 mm.

Features

- Durable design. Reliable IP44 design (no plastic parts). Resists > 1 mm particles and water spray. Prints in environments up to 45 °C.
- Minimize operator errors. Intuitive and simple user interface options: choose 7" WYSIWYG touch screen or quick and convenient web-based UI for remote access from a laptop or desktop PC.
- e-SolarMark C340 laser coders provide high quality codes with superior quality on a wide variety of substrates including difficult to code laminate coated materials, at a rate of up to 125 meters per minute.
- e-SolarMark C340 ensures that the user experience is easy and straightforward.
- Utilizing innovative algorithms and unique fonts allows for perfect lines and smooth curves, producing high-quality codes at faster line speeds.

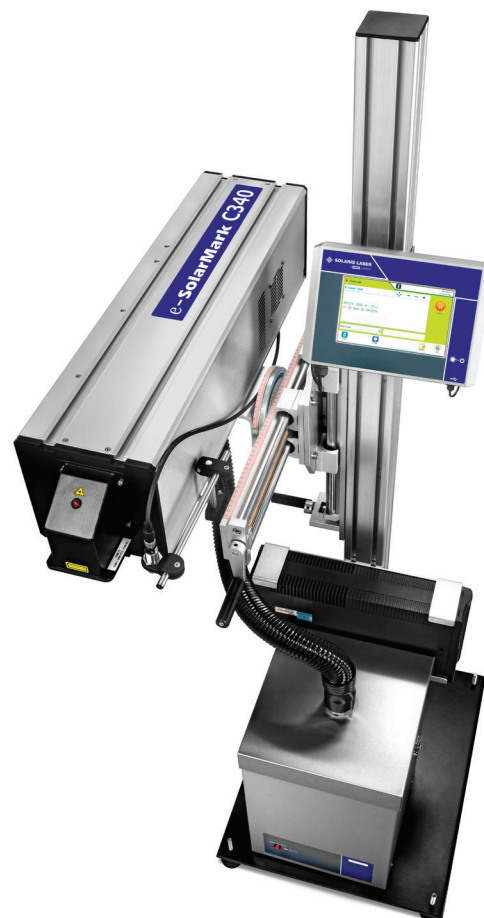


SOLARIS LASER

a **DOVER** company


e-SolarMark C340 specifications

Laser model dimensions

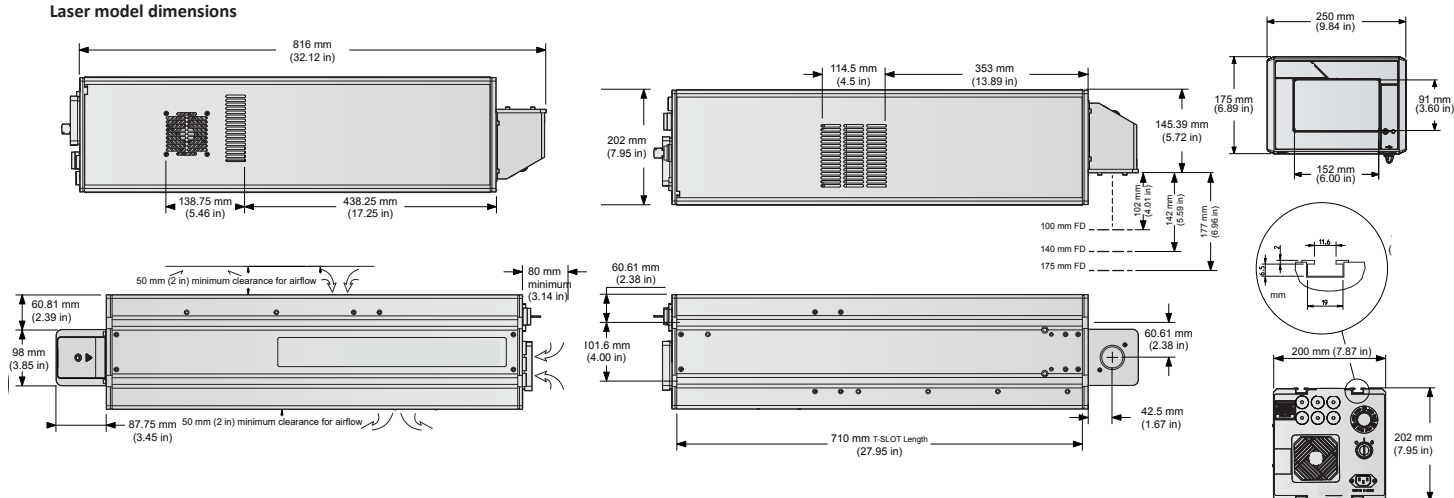

e-SolarMark C340 30-watt sealed CO ₂	
Production line speed (max.)	125 m/min.*
Marking speed (max.)	900 characters/s
Print features	• Number of text lines: limited only by character height and allowable print area • Character height: from 1 to 120 mm • Choice of characters: Chinese, Latin and Unicode fonts • Wide selection of languages: Arabic, Bosnian, Brazilian Portuguese, Bulgarian, Chinese, Croatian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Romanian, Russian, Serbian, Slovenian, Spanish, Swedish, Turkish
Standard coding area and focal distance (mm)	• Lens 100 x 100 / fd 140
Operations	• Web or optional user Interface 7" WYSIWYG color touch screen, QWERTY or AZERTY virtual keyboard, navigation via icons including on-line help file • Message storage capacity of 500 jobs • Upload and download jobs and settings via USB Flash Drive • Standard I/O: Ethernet interface, USB, encoder, sensor, extractor controls, optional Markem-Imaje alarm tower, remote interlocks (dual channels)
Other characteristics	• Printhead weight: 21.4 kg • Printhead: anodized aluminum • Dust/Humidity protection: IP44 • Operating temperature range: 5 to 45 °C- Humidity: 5 to 80% non-condensing • Electrical power supply: 100-240 V with automatic switching- Frequency: 50/60 Hz- Power consumption 7 A; 700 VA
Options	• All-in-one Stand includes: mast with X & Y adjustments, footplate with casters, printhead bracket mount, user interface support mount, mounting bracket, cable clip, package sensor and sensor mount • Dust and fume extractor • Coding area and focal distance (mm): lens 70 x 70 / fd 100 – lens 100 x 100 / fd 140 – lens 120 x 120 / fd 175 • Remote user interface
Accessories	• Guarding tunnel, photocell package sensor, encoder, alarm beacon
PC software	• Web user interface provided as standard

* Depends on the size and the complexity of the message as well as the nature of the surface marked



LASER INSTITUTE OF AMERICA

Solaris Laser

LIA member since 1996



Solaris Laser Sp. z o.o
Farbiarska 39, 02-862 Warsaw, Poland
Tel.: +48 22 843 18 03
sales@solarislaser.com.pl
www.solarislaser.com.pl